



Programming / Pairing:

The hub is in Programming / Pairing mode when the LED flashes purple. If the LED does not flash purple, press and hold the settings button for approximately 5 seconds until the LED starts flashing purple, then release the button.

Factory Reset:

Press and hold the setting button for approximately 15 seconds until the red LED start flashing and then release.

Product Parameter

Indoor use only

Internet	2.4G Wi-Fi (802.11 b/g/n)
Power	USB Type-C (5V/1A)
Radio frequency	433.05-434.79MHz
Dimension	L75 * W75 * H30 (mm)

Status Indicator

Color	Meaning	Duration
 Constant Blue	Working fine	Constant
 Slow Flashing Yellow	Connect to server	Continuously till status change
 Constant Yellow	Network is connected	Constant
 Slow Flashing Red	Network is disconnected	Continuously till status change
 Quick Flashing Red	Hub reset	5 times
 Slow Flashing Purple	Pairing underway	Continuously till status change
 Slow Flashing Green	Upgrade in progress	Continuously till status change



Quick Start Guide for M-Box

Model: DD7006M



Product
Certification

You can set up M-box using either Shademate or Shadetool, but not both at the same time.

	Set up with Shademate	Set up with Shadetool
Account registration and login	✓	✗
Basic shade control	✓	✓
Shade limits setting	✓	✓
Control away from home	✓	✗
Scenes/Automations setup and run	✓	✗
Matter Fabric Sharing (Connect to Amazon Alexa, Apple Home, Google Home, SmartThings, etc. via "matter".)	✓	✓
Cloud-to-cloud skills (Connect to Amazon Alexa, Google Home, IFTTT, and SmartThings via "skill".)	✓	✗

Please scan below QR code to download APP

Shademate



Shadetool



Please scan below QR code to download APP manual


Shademate



Shadetool



Please scan below QR code to learn more about link up M-Box with home router, setup Shademate/Shadetool APP, and establish connection with other IoT applications.

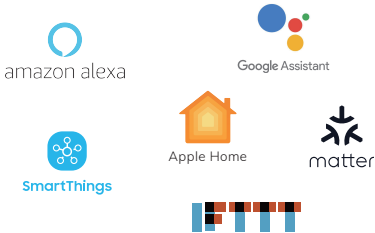


Important Usage Tips for MATTER

After setting up the M-Box using Shademate/Shadetool, do not directly add the M-Box to a third-party MATTER system (e.g. Amazon Alexa, Apple Home, Google Home, Smartthings, etc) by scanning the QR code or entering the M-Box setup code on the M-box, packaging, or user manual. Doing so will cause Shademate/Shadetool to lose connection with the M-Box.

To properly integrate the M-Box with a third-party MATTER system, share the M-Box using the "Matter Fabric Sharing" feature in Shademate/Shadetool.

Caution



1. Stay clear of concrete walls or corners



2. Keep away from electronic appliances